
Dynamic turn bar

This is the solution to avoid the friction generated by the 45° bar


RC40 MODEL

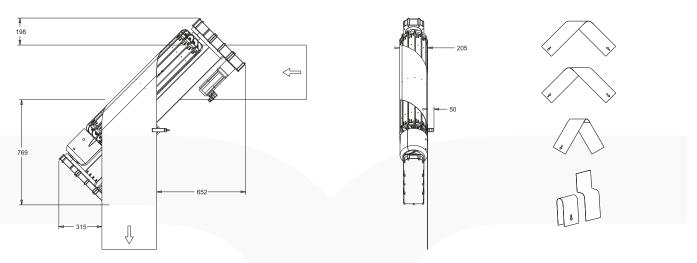

Advantages

Avoid tension generated by static turn bar
Sensor for web guide
Possibility to run at various angles or straight
Wrinkle reduction
Can be used for folded web
Static electricity reduction
Large range of widths and speeds available

A reduced overall cost by elimination of pulling station and web guide system

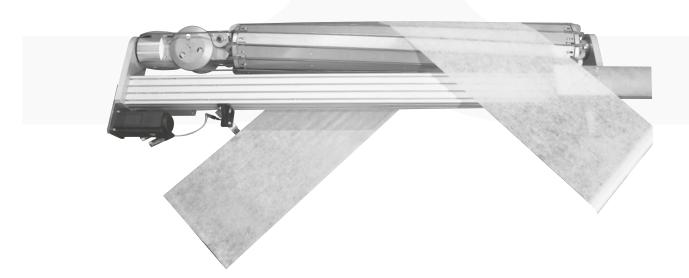



ZAC la petite Camargue 34400 LUNEL FRANCE

☑ Mob +33 6 11 89 15 16☎ Tel +33 9 82 55 16 68

@ E-mail: info@enthon-engineering.com

www.enthonengineering.com